

# FEATURES


- Low service costs
- Long life
- Available in all climate classes
- Baskets available equal to EL freezers



## | EL SS | STAINLESS STEEL LID FOR PREPARING FOOD



AVAILABLE IN 6 SIZES

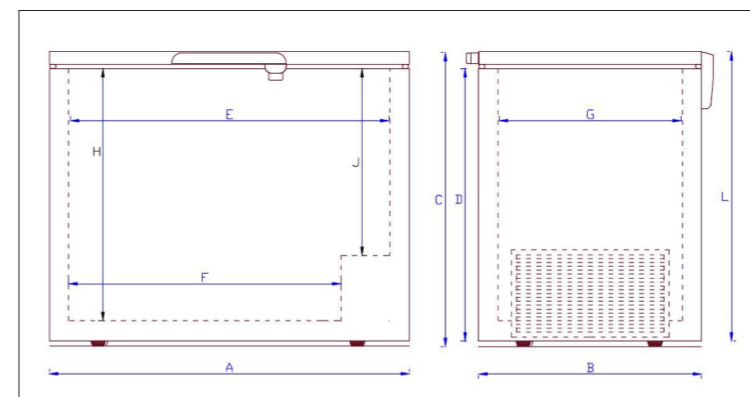

	EL 22 SS	EL 35 SS	EL 45 SS	EL 53 SS	EL 61 SS	EL 71 SS
Ambient temperature range	+10 to +30	+10 to +30	+10 to +30	+10 to +30	+10 to +30	+10 to +30
Gross volume, litres	215	347	447	527	607	701
Net volume, litres	205	331	427	504	580	670
Temperature range inside unit	-14 to -22	-14 to -22	-14 to -22	-14 to -22	-14 to -22	-14 to -22
Standard refrigerant	R134a	R134a	R134a	R134a	R134a	R134a
Refrigerant available: R600a / R290	Yes	Yes	Yes	Yes	Yes	Yes
Energy consumption / 24 h kwh at 18 deg. C	0,71	0,9	1,05	1,3	1,52	1,95
Input power (watt):	124	141	146	211	211	245
<b>DIMENSIONS</b>						
External dimensions (WxDxH)	725x655x865	1055x655x865	1305x655x865	1505x655x865	1705x655x865	1805x695x865
Internal dimensions (WxDxH)	606x536x697	936x536x697	1186x536x697	1386x536x697	1586x536x697	1686x576x741
Dimension A	725	1055	1305	1505	1705	1805
Dimension B	655	655	655	655	655	695
Dimension C	865	865	865	865	865	865
Dimension D	780	780	780	780	780	780
Dimension E	606	936	1186	1386	1586	1686
Dimension F	406	736	986	1186	1386	1486
Dimension G	536	536	536	536	536	576
Dimension H	697	697	697	697	697	741
Dimension J	447	447	447	447	447	491
Dimension L	850	850	850	850	850	850
Insulation, mm	60	60	60	60	60	60
<b>ACCESSORIES</b>						
Dividers	Optional	Optional	Optional	Optional	Optional	Optional
Baskets Incl.	1	2	2	3	3	3
Max. Number of basket possible	1	2	3	4	4	6
Castors	Optional	Optional	Optional	Optional	Optional	Optional
Castors w. brakes	Optional	Optional	Optional	Optional	Optional	Optional
Lock	Incl.	Incl.	Incl.	Incl.	Incl.	Incl.
Thermometer	Optional	Optional	Optional	Optional	Optional	Optional
<b>OTHER DATA</b>						
Outer cabinet	White	White	White	White	White	White
Inner cabinet	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Inner cabinet: option	Steel inner liner	Steel inner liner	Steel inner liner	Steel inner liner	Steel inner liner	Steel inner liner
Lid	Stainless EN 1.4301	Stainless EN 1.4301	Stainless EN 1.4301	Stainless EN 1.4301	Stainless EN 1.4301	Stainless EN 1.4301
Type of cooling	Static	Static	Static	Static	Static	Static
Type of defrost	Manual	Manual	Manual	Manual	Manual	Manual
Power	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz
Power 110 v/ 60 Hz	Optional	Optional	Optional	Optional	Optional	Optional
Thermostat	Analog	Analog	Analog	Analog	Analog	Analog
Freezing capacity kg / 24 h	15	22	27	36	38	43
Light in Lid	Incl.	Incl.	Incl.	Incl.	Incl.	Incl.
Calendar in Lid	Incl.	Incl.	Incl.	Incl.	Incl.	Incl.
Net weight, kg	43	54	64	67	77	85
Gross weight, kg	46	58	68	71	82	89
<b>SHIPPING</b>						
20' cont. Capacity	42	30	24	20	18	14
40' cont. Capacity	90	64	50	46	40	30
40' HC cont. Capacity	126	88	62	61	52	42
Standard Trailer capacity	102	74	60	52	44	42